


## Single Piece Wheels



**Tyre Sizes**  
9.5L - 14  
thru  
20.5 x 25

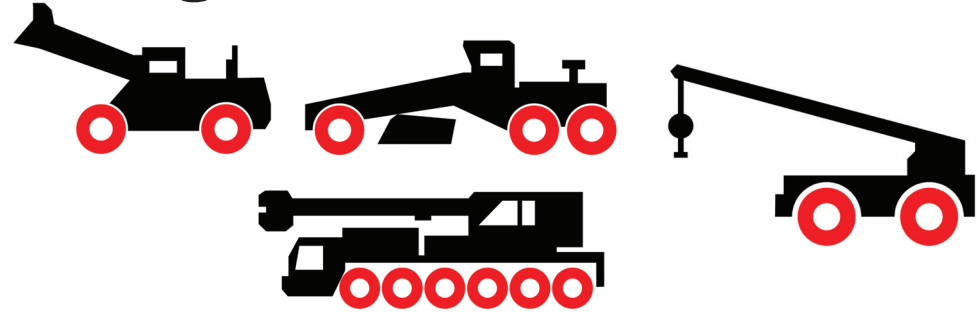


170237  
Bead Push Off  
Tool


170238  
Dual Agricultural  
Push Off Tool

170229  
Dual Agricultural 300  
Push Off Tool

170232 Combi  
Bead Breaker

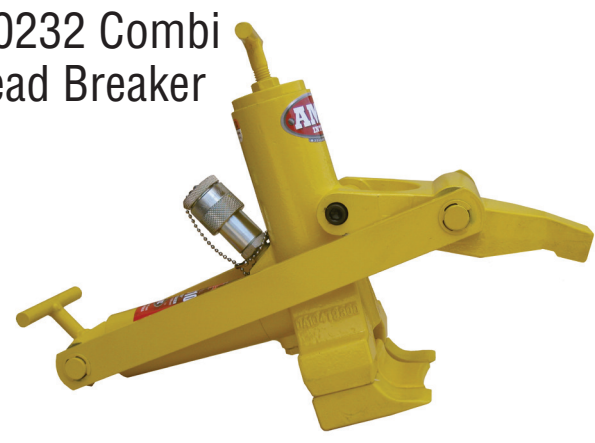

## 3 Piece Wheels



**Tyre Sizes**  
23.5 x 25  
26.5 x 25  
29.5 x 25




170259  
Diamondback  
Bead Breaker  
w/Case

Volvo Adapter  
(Low Clearance/Backside)  
adapter for 170259

170258  
Stinger  
Bead Breaker



## 5 Piece Wheels

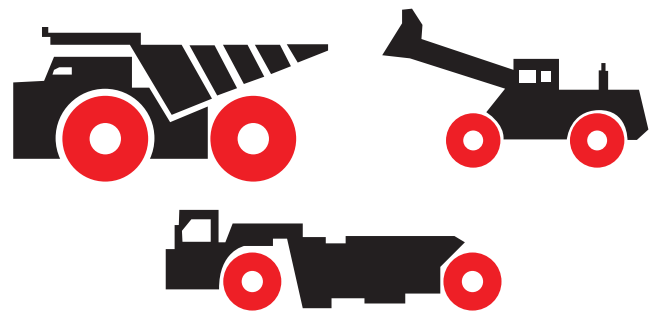

170227  
OTR 1825 Bead Breaker



**Wheel Sizes**  
25" - 51"




Alum-a-Stack  
10T-205016  
25T-205012

Hydraulic Rams




Model	Capacity	Stroke	Retracted Height
205034	10 Ton	2-1/8" (5.5 cm)	4-3/4" (12 cm)
205035	10 Ton	4" (10.5 cm)	6-3/4" (17 cm)
205036	10 Ton	6-1/8" (15.5 cm)	9-3/4" (25 cm)
205038	10 Ton	8" (20.5 cm)	11-3/4" (30 cm)
205040	10 Ton	10-1/8" (25.5 cm)	13-3/4" (35 cm)
205039	30 Ton	2-7/16" (6 cm)	4-5/8" (12 cm)
	25 Ton	8-1/4" (21 cm)	12-3/4" (32.5 cm)
	25 Ton	6-1/4" (16 cm)	10-3/4" (27.5 cm)

## 5 Piece Giant OTR

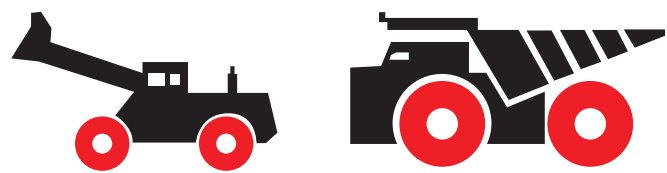

**Wheel Sizes**  
51" - 63"

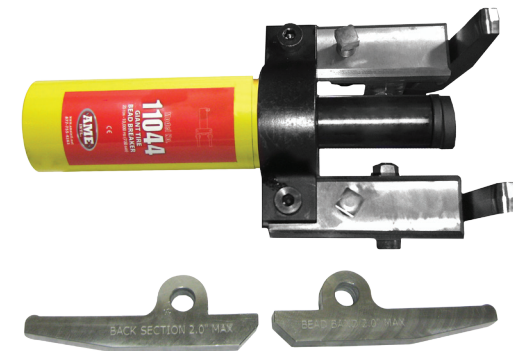

OTR 3000  
Giant Tire  
Bead  
Breaker



OTR 3000  
Adapter for Short Rim Flanges



CAT Shur-Loc Jaw  
for OTR 3000

## Hydraulic Pumps



5191535  
5 Litre Air Hydraulic Pump



5191530  
8 Litre Air Hydraulic Pump

5191537  
2.5 Litre Titan  
Air Hydraulic  
Pump




10,000 PSI  
for use with  
all AME Tools.

## Jacks & Jack Stands

### Jack Stands

Description
SuperLift Jack Stand Transporter
100 Ton Support Stand
200 Ton Support Stand

Super Lift Jack

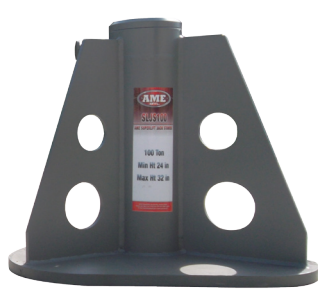

High Tonnage  
Jack Stands

205031



205032



205030



### Aluminium Jacks

Capacity (Tons)	Minimum Height	Maximum Height	Total Width	Frame Length	Handle Height	Cylinder Base	Weight
100	27" (69 cm)	43" (109 cm)	29" (74 cm)	96" (244 cm)	40" (101 cm)	13" (33 cm)	771 lbs. (350 kg)
100	38" (97 cm)	65" (165 cm)	29" (74 cm)	96" (244 cm)	40" (101 cm)	13" (33 cm)	851 lbs (386 kg)
150	27" (69 cm)	43" (109 cm)	29" (74 cm)	96" (244 cm)	40" (101 cm)	15" (38 cm)	794 lbs (360 kg)
150	38" (97 cm)	65" (165 cm)	29" (74 cm)	96" (244 cm)	40" (101 cm)	15" (38 cm)	905 lbs (410 kg)
200	27" (69 cm)	43" (109 cm)	32" (82 cm)	96" (244 cm)	40" (101 cm)	15" (38 cm)	1243 lbs (564 kg)
200	38" (97 cm)	65" (165 cm)	32" (82 cm)	96" (244 cm)	40" (101 cm)	15" (38 cm)	1345 lbs (610 kg)
250	27" (69 cm)	43" (109 cm)	32" (82 cm)	96" (244 cm)	40" (101 cm)	15" (38 cm)	1415 lbs (640 kg)
250	38" (97 cm)	32" (82 cm)	32" (82 cm)	96" (244 cm)	40" (101 cm)	15" (38 cm)	1555 lbs (705 kg)

Model	Capacity (Tons)	Stroke	Retracted Height	Max Height	Weight
205032	100	6" (15 cm)	11.75" (30 cm)	17.75" (45 cm)	53 lbs (24 kg)
205031	55	6" (15 cm)	11.75" (30 cm)	12.25" (31 cm)	29 lbs (13 kg)
		10" (25.5 cm)	16.25" (41 cm)	26.25" (66.5 cm)	38 lbs (17 kg)
205030	55	6" (15 cm)	13.2" (33.5 cm)	19.1" (48.5 cm)	26.2 lbs (12 kg)
		10" (25.5 cm)	16.25" (41 cm)	26.25" (66.5 cm)	38 lbs (17 kg)

205028  
100 Ton Jack Plate  
30" x 30" x 25"



205047  
200 Ton  
Jack Plate  
45" x 45" x 7.5"




115758  
OTR  
Wheel Chock



115759  
OTR Wheel Chock



205026  
3 piece, 100 Ton  
Steel Cribbing

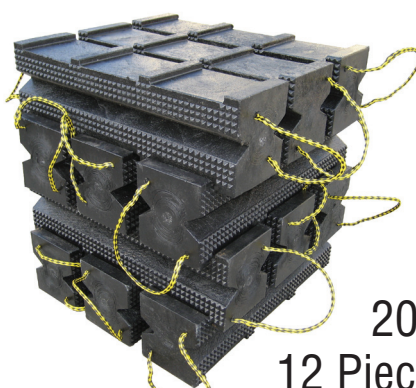

205041  
12 Piece Cribbing  
150 Ton

Model	Description	Length	Width	Height
115758	For Mine support equipment such as lubrication trucks and heavy maintenance vehicles	33 cm	47 cm	27 cm
115759	For mine haul trucks with tire sizes over 105" (266.7 cm). Diameter and load capacities up to 240 tons. Chock design for normal haul road grades.	30 cm	65 cm	40 cm